



Thermoplastic Pillow Blocks

With optional bearing inserts:
Stainless Steel-SUCTP
Hard Chrome Coated-CUCTP
Black Oxide-BUCTP



- B-type seal
- End Caps Available
- Overview of corrosion resistant products - pg. 52

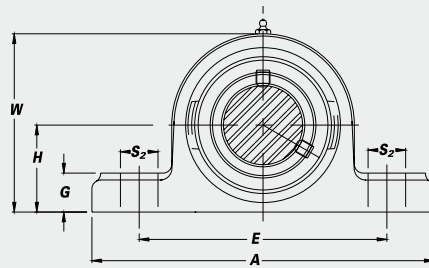

CORROSION RESISTANT

| Unit No. | Shaft Dia. | | Dimensions (in.) (mm) | | | | | | | | | | Bolt Used (in.) | Bearing No. | Housing No. | Weight (lbs.) |
|----------|------------|--------|-----------------------|---|---|---|----------------|----------------|---|---|----|---|-----------------|-------------|-------------|---------------|
| | d (in.) | d (mm) | H | A | E | B | S ₂ | S ₁ | G | W | Bi | N | | | | |

SUCTP with Stainless Steel Bearing Inserts

| | | | | | | | | | | | | | | | | | | | | |
|--------------|---------|-------|--------|--------|-----|------|----|----|----|----|----|----|------|------|------|-----------|--------|------------|--------|----|
| SUCTP 201-8 | 1/2 | | | | | | | | | | | | | | | SUC 201-8 | | | | |
| 202-10 | 5/8 | 15.88 | 5 | 33.3 | 127 | 33.3 | 95 | 38 | 14 | 11 | 14 | 14 | 66 | 31.0 | 12.7 | 18.3 | 3/8 | 202-10 | TP 204 | .8 |
| 204-12 | 3/4 | 19.05 | | | | | | | | | | | | | | | | 204-12 | | |
| 204 | | 20 | | | | | | | | | | | | | | | | 204 | | |
| SUCTP 205-14 | 7/8 | 22.23 | | | | | | | | | | | | | | | | SUC 205-14 | | |
| 205 | | 25 | 17.8 | 51.2 | 140 | 105 | 38 | 14 | 11 | 14 | 14 | 71 | 34.0 | 14.3 | 19.7 | 3/8 | 205 | TP 205 | .8 | |
| 205-16 | 1 | 25.4 | | | | | | | | | | | | | | | | 205-16 | | |
| SUCTP 206-18 | 1 1/8 | 28.57 | | | | | | | | | | | | | | | | SUC 206-18 | | |
| 206 | | 30 | 111.16 | 613.32 | 163 | 119 | 46 | 18 | 14 | 18 | 18 | 84 | 38.1 | 15.9 | 22.2 | 1/2 | 206 | TP 206 | 1.2 | |
| 206-19 | 1 3/16 | 30.16 | | | | | | | | | | | | | | | | 206-19 | | |
| 206-20 | 1 1/4 S | 31.75 | | | | | | | | | | | | | | | | 206-20 | | |
| SUCTP 207-20 | 1 1/4 | 31.75 | | | | | | | | | | | | | | | | SUC 207-20 | | |
| 207-21 | 1 5/16 | 35.42 | 17.8 | 65.8 | 168 | 127 | 48 | 18 | 14 | 18 | 18 | 94 | 42.9 | 17.5 | 25.4 | 1/2 | 207-21 | TP 207 | 1.7 | |
| 207-22 | 1 3/8 | 35.14 | | | | | | | | | | | | | | | | 207-22 | | |
| 207 | | 35 | | | | | | | | | | | | | | | | 207 | | |
| 207-23 | 1 7/16 | 35.42 | | | | | | | | | | | | | | | | 207-23 | | |
| SUCTP 208-24 | 1 1/2 | 38.1 | | | | | | | | | | | | | | | | SUC 208-24 | | |
| 208 | | 40 | 115.16 | 71.4 | 184 | 137 | 54 | 18 | 14 | 20 | 20 | 99 | 49.2 | 19.0 | 30.2 | 1/2 | 208 | TP 208 | 2.2 | |

CUCTP with Hard Chrome Coated Bearing Inserts

| | | | | | | | | | | | | | | | | | | | | |
|--------------|---------|-------|--------|--------|-----|-----|----|----|----|----|----|----|------|------|------|-----|--------|------------|-----|--|
| CUCTP 204-12 | 3/4 | 19.05 | | | | | | | | | | | | | | | | CUC 204-12 | | |
| 204 | | 20 | 15.88 | 5 | 127 | 95 | 38 | 14 | 11 | 14 | 14 | 66 | 31.0 | 12.7 | 18.3 | 3/8 | 204 | TP 204 | .8 | |
| CUCTP 205-14 | 7/8 | 22.23 | | | | | | | | | | | | | | | | CUC 205-14 | | |
| 205 | | 25 | 17.8 | 51.2 | 140 | 105 | 38 | 14 | 11 | 14 | 14 | 71 | 34.0 | 14.3 | 19.7 | 3/8 | 205 | TP 205 | .8 | |
| 205-16 | 1 | 25.4 | | | | | | | | | | | | | | | | 205-16 | | |
| CUCTP 206-18 | 1 1/8 | 28.57 | | | | | | | | | | | | | | | | CUC 206-18 | | |
| 206 | | 30 | 111.16 | 613.32 | 163 | 119 | 46 | 18 | 14 | 18 | 18 | 84 | 38.1 | 15.9 | 22.2 | 1/2 | 206 | TP 206 | 1.2 | |
| 206-19 | 1 3/16 | 30.16 | | | | | | | | | | | | | | | | 206-19 | | |
| 206-20 | 1 1/4 S | 31.75 | | | | | | | | | | | | | | | | 206-20 | | |
| CUCTP 207-20 | 1 1/4 | 31.75 | | | | | | | | | | | | | | | | CUC 207-20 | | |
| 207-22 | 1 3/8 | 35.42 | 17.8 | 65.8 | 168 | 127 | 48 | 18 | 14 | 18 | 18 | 94 | 42.9 | 17.5 | 25.4 | 1/2 | 207-22 | TP 207 | 1.7 | |
| 207 | | 35 | | | | | | | | | | | | | | | | 207 | | |
| 207-23 | 1 7/16 | 35.42 | | | | | | | | | | | | | | | | 207-23 | | |
| CUCTP 208-24 | 1 1/2 | 38.1 | | | | | | | | | | | | | | | | CUC 208-24 | | |
| 208 | | 40 | 115.16 | 71.4 | 184 | 137 | 54 | 18 | 14 | 20 | 20 | 99 | 49.2 | 19.0 | 30.2 | 1/2 | 208 | TP 208 | 2.2 | |

BUCTP with Black Oxide Bearing Inserts

| | | | | | | | | | | | | | | | | | | | | |
|--------------|---------|-------|--------|--------|-----|-----|----|----|----|----|----|----|------|------|------|-----|--------|------------|-----|--|
| BUCTP 201-8 | 1/2 | | | | | | | | | | | | | | | | | BUC 201-8 | | |
| 202-10 | 5/8 | 15.88 | 5 | 33.3 | 127 | 95 | 38 | 14 | 11 | 14 | 14 | 66 | 31.0 | 12.7 | 18.3 | 3/8 | 202-10 | TP 204 | .8 | |
| 204-12 | 3/4 | 19.05 | | | | | | | | | | | | | | | | 204-12 | | |
| 204 | | 20 | | | | | | | | | | | | | | | | 204 | | |
| BUCTP 205-14 | 7/8 | 22.23 | | | | | | | | | | | | | | | | BUC 205-14 | | |
| 205 | | 25 | 17.8 | 51.2 | 140 | 105 | 38 | 14 | 11 | 14 | 14 | 71 | 34.0 | 14.3 | 19.7 | 3/8 | 205 | TP 205 | .8 | |
| 205-16 | 1 | 25.4 | | | | | | | | | | | | | | | | 205-16 | | |
| BUCTP 206-18 | 1 1/8 | 28.57 | | | | | | | | | | | | | | | | BUC 206-18 | | |
| 206 | | 30 | 111.16 | 613.32 | 163 | 119 | 46 | 18 | 14 | 18 | 18 | 84 | 38.1 | 15.9 | 22.2 | 1/2 | 206 | TP 206 | 1.2 | |
| 206-19 | 1 3/16 | 30.16 | | | | | | | | | | | | | | | | 206-19 | | |
| 206-20 | 1 1/4 S | 31.75 | | | | | | | | | | | | | | | | 206-20 | | |
| BUCTP 207-20 | 1 1/4 | 31.75 | | | | | | | | | | | | | | | | BUC 207-20 | | |
| 207-22 | 1 3/8 | 35.42 | 17.8 | 65.8 | 168 | 127 | 48 | 18 | 14 | 18 | 18 | 94 | 42.9 | 17.5 | 25.4 | 1/2 | 207-22 | TP 207 | 1.7 | |
| 207 | | 35 | | | | | | | | | | | | | | | | 207 | | |
| 207-23 | 1 7/16 | 35.42 | | | | | | | | | | | | | | | | 207-23 | | |
| BUCTP 208-24 | 1 1/2 | 38.1 | | | | | | | | | | | | | | | | BUC 208-24 | | |
| 208 | | 40 | 115.16 | 71.4 | 184 | 137 | 54 | 18 | 14 | 20 | 20 | 99 | 49.2 | 19.0 | 30.2 | 1/2 | 208 | TP 208 | 2.2 | |