

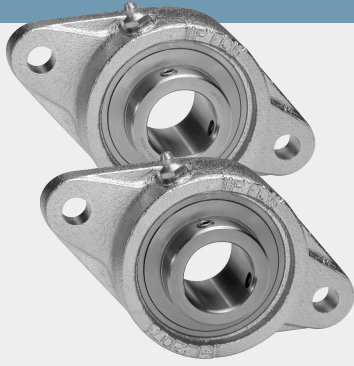


# Nickel Plated 2-Bolt Flanges

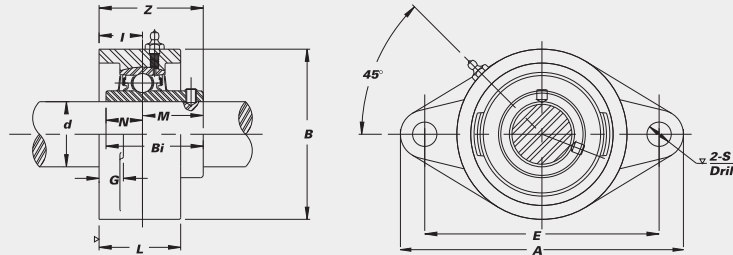

## With optional bearing inserts: Stainless Steel-SUCNPFL Hard Chrome Coated-CUCNPFL

- B-type seals
- Available with locking collar bearings. Please ask.
- Overview of corrosion resistant products – pg. 48



CORROSION RESISTANT

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d	d	A	E	I	G	L	S	B	Z	Bi	N				

### SUCNPFL with Stainless Steel Bearing Inserts

SUCNPFL 201-8	1/2														SUC 201-8		
202-10	5/8	20	47/16	317/32	19/32	7/16	1	25/64	23/8	19/16	1.2205	0.5000	0.7205	5/16	202-10		
204-12	3/4		113	89.7	15	11	25	10	60	33.3	31.0	12.7	18.3	204-12	NPFL 204	1.0	
204														204			
SUCNPFL 205-14	7/8	25	51/8	357/64	5/8	1/2	11/16	15/32	211/16	115/32	1.3386	0.5630	0.7756	3/8	SUC 205-14		
205			130	98.8	16	13	27	11.9	68	37.3	34.0	14.3	19.7	205	NPFL 205	1.5	
205-16	1													205-16			
SUCNPFL 206-18	1 1/8	30	513/16	419/32	45/64	1/2	17/32	15/32	35/32	119/32	1.5000	0.6260	0.8740	3/8	SUC 206-18		
206			148	116.7	18	13	31	11.9	80	40.5	38.1	15.9	22.2	206	NPFL 206	2.2	
206-19	1 3/16													206-19			
206-20	1 1/4 S													206-20			
SUCNPFL 207-20	1 1/4	35	611/32	51/8	3/4	9/16	111/32	33/64	317/32	13/4	1.6890	0.6890	1.0000	7/16	SUC 207-20		
207-21	1 5/16		161	130.2	19	14	34	13	90	44.5	42.9	17.5	25.4	207-21	NPFL 207	2.9	
207-22	1 3/8													207-22			
207														207			
207-23	1 7/16													207-23			
SUCNPFL 208-24	1 1/2	40	67/8	521/32	53/64	9/16	113/32	33/64	315/16	2	1.9370	0.7480	1.1890	7/16	SUC 208-24		
208			175	143.7	21	14	36	13	100	50.8	49.2	19.0	30.2	208	NPFL 208	3.5	
SUCNPFL 209-27	1 11/16	45	713/32	527/32	55/64	19/32	11/2	19/32	41/4	21/16	1.9370	0.7480	1.1890	1/2	SUC 209-27		
209-28	1 3/4		188	148.4	22	15	38	15	108	52.4	49.2	19.0	30.2	209-28	NPFL 209	4.4	
209														209			
SUCNPFL 210-31	1 15/16	50	73/4	63/16	55/64	19/32	19/16	19/32	417/32	25/32	2.0315	0.7480	1.2835	1/2	SUC 210-31		
210			197	157	22	15	40	15	115	54.8	51.6	19.0	32.6	210	NPFL 210	5.1	
210-32	2 S													210-32			
SUCNPFL 211-32	2		813/16	71/4	63/64	23/32	111/16	41/64	51/8	25/16	2.1890	0.8740	1.3150	9/16	SUC 211-32		
211-35	2 3/16		224	184	25	18	43	16.3	130	58.7	55.6	22.2	33.4	211-35	NPFL 211	7.3	
SUCNPFL 212-36	2 1/4		927/32	715/16	19/64	23/32	17/8	41/64	51/2	223/32	2.5630	1.0000	1.5630	9/16	SUC 212-36		
212-39	2 7/16		250	201.6	29	18	48	16.3	140	69.1	65.1	25.4	39.7	212-39	NPFL 212	9.5	

### CUCNPFL with Hard Chrome Coated Bearing Inserts

CUCNPFL 204-12	3/4	20	47/16	317/32	19/32	7/16	1	25/64	23/8	19/16	1.2205	0.5000	0.7205	5/16	CUC 204-12		
204			113	89.7	15	11	25	10	60	33.3	31.0	12.7	18.3	204	NPFL 204	1.0	
CUCNPFL 205-14	7/8	25	51/8	357/64	5/8	1/2	11/16	15/32	211/16	115/32	1.3386	0.5630	0.7756	3/8	CUC 205-14		
205			130	98.8	16	13	27	11.9	68	37.3	34.0	14.3	19.7	205	NPFL 205	1.5	
205-16	1													205-16			
CUCNPFL 206-18	1 1/8	30	513/16	419/32	45/64	1/2	17/32	15/32	35/32	119/32	1.5000	0.6260	0.8740	3/8	CUC 206-18		
206			148	116.7	18	13	31	11.9	80	40.5	38.1	15.9	22.2	206	NPFL 206	2.2	
206-19	1 3/16													206-19			
206-20	1 1/4 S													206-20			
CUCNPFL 207-20	1 1/4	35	611/32	51/8	3/4	9/16	111/32	33/64	317/32	13/4	1.6890	0.6890	1.0000	7/16	CUC 207-20		
207-22	1 3/8		161	130.2	19	14	34	13	90	44.5	42.9	17.5	25.4	207-22	NPFL 207	2.9	
207														207			
207-23	1 7/16													207-23			
CUCNPFL 208-24	1 1/2	40	67/8	521/32	53/64	9/16	113/32	33/64	315/16	2	1.9370	0.7480	1.1890	7/16	CUC 208-24		
208			175	143.7	21	14	36	13	100	50.8	49.2	19.0	30.2	208	NPFL 208	3.5	
CUCNPFL 209-27	1 11/16	45	713/32	527/32	55/64	19/32	11/2	19/32	41/4	21/16	1.9370	0.7480	1.1890	1/2	CUC 209-27		
209-28	1 3/4		188	148.4	22	15	38	15	108	52.4	49.2	19.0	30.2	209-28	NPFL 209	4.4	
209														209			
CUCNPFL 210-31	1 15/16	50	73/4	63/16	55/64	19/32	19/16	19/32	417/32	25/32	2.0315	0.7480	1.2835	1/2	CUC 210-31		
210			197	157	22	15	40	15	115	54.8	51.6	19.0	32.6	210	NPFL 210	5.1	
210-32	2 S													210-32			